


| VER | DETAIL DISCRPTION | DATE |
|-----|-------------------|-----------|
| 00 | FIRST ISSUE | 2013-1-10 |

| INTERFACE | |
|-----------|-----------|
| 1 | VDD(5V) |
| 2 | VSS |
| 3 | V0 |
| 4 | RST |
| 5 | E1 |
| 6 | E2 |
| 7 | R/W |
| 8 | RS |
| 9 | DB0 |
| 10 | DB1 |
| 11 | DB2 |
| 12 | DB3 |
| 13 | DB4 |
| 14 | DB5 |
| 15 | DB6 |
| 16 | DB7 |
| 17 | LED-A(5V) |
| 18 | LED-K |
| 19 | N.C |
| 20 | N.C |

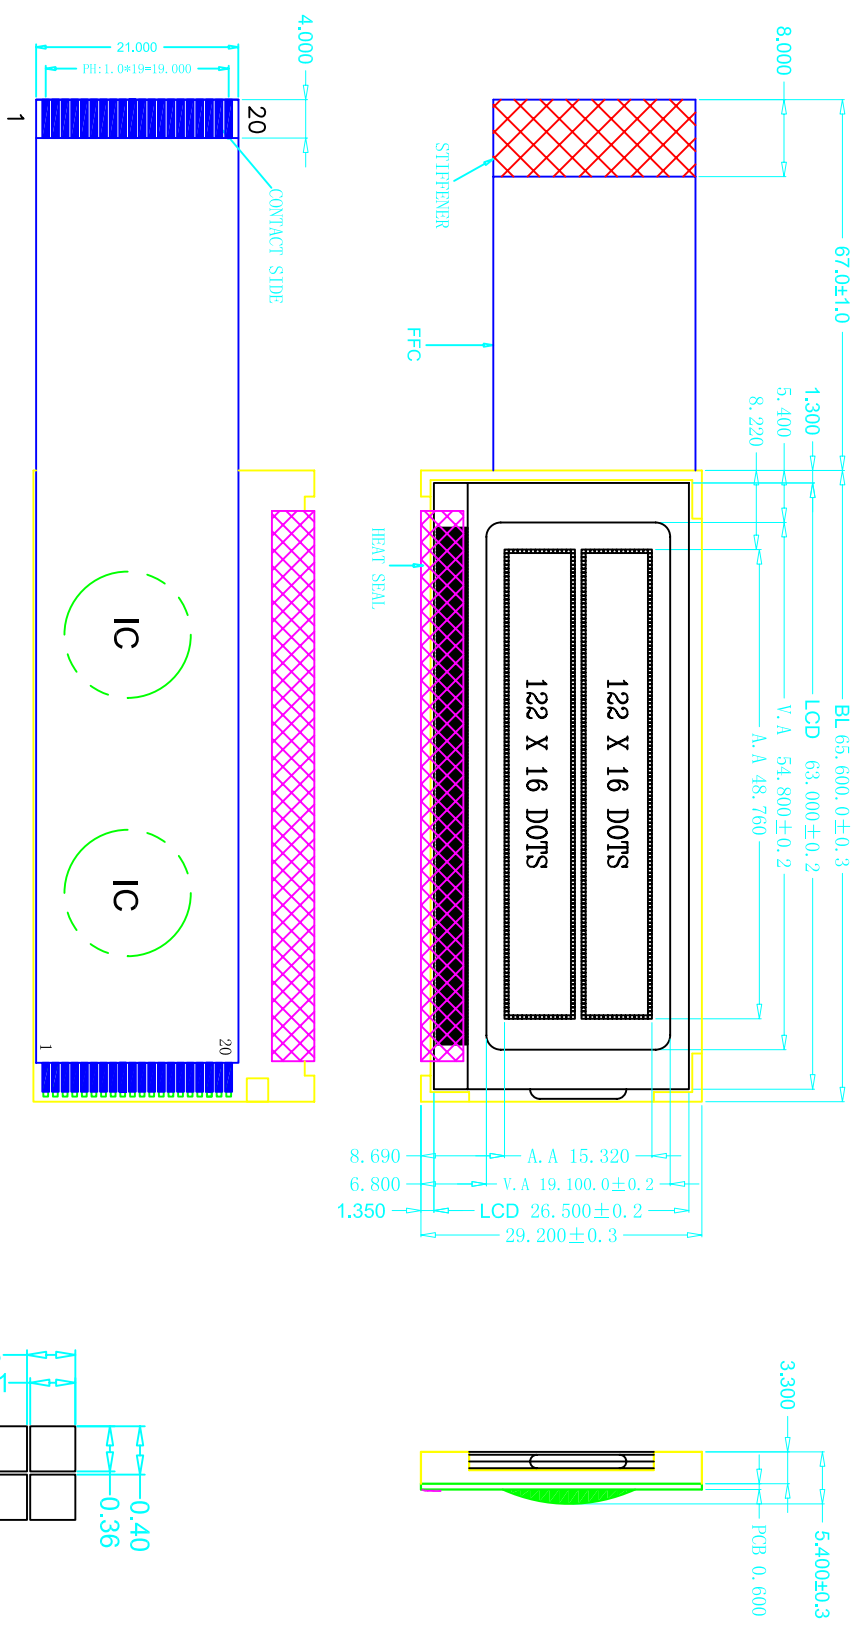

SPECIFICATION:

- 1). STN (blue) /NEGATIVE/TRANSMISSIVE
- 2). DUTY:1/32. BIAS:1/5. VOP=5.0V
- 3). VIEWING ANGLE: 6 0°CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: white I=80MA
- 6). DRIVE IC: SBN1661G
- 7). DRIVE POWER: VDD=5.0V

深圳华显晶显示技术有限公司

| | | | | | |
|-------------------------|-------|-----------|-----------|--------------|-----------|
| Unspecified Tolerances: | ±0.20 | UNITS: mm | DATE: | MODE NUMBER: | SHEET: |
| DESIGN BY: | WZQ | | 2013/1/10 | HSM12232H-B | 1 OF 1 |
| CHECKED BY: | | | | | DATE: |
| CUSTOM NO.: | | | | | 2013/1/10 |

DO NOT SCALE THIS DRAWING.

